

# Boulevard® Decking


Featuring Boulevard Thermally Modified North American Hardwood

Boulevard Decking is an ecologically responsible deckboard that performs like exotic hardwoods. Made of Tournesol Siteworks' Boulevard thermally-modified hardwoods, the gorgeous decking material has a 25+ year life span, a Class A flame spread rating, is splinter, warp and twist resistant, and will naturally weather to a beautiful, rich patina.

Tournesol's Boulevard wood starts with FSC-certified harvested in Minnesota and Wisconsin. The lumber is treated at high temperatures (up to 374°F) and with steam in a special kiln in Northern Minnesota. The natural process changes the make-up of the wood, creating a naturally dark-colored lumber with exceptional rot, pest and decay resistance. All lumber is harvested & processed entirely in the U.S. Boulevard decking is 50% lighter (good for shipping) and far easier to modify and work with on site than South American hardwoods. All Boulevard wood is 100% free of the arsenic, copper, chrome and other hazardous metals present in pressure-treated wood.



- South American hardwood-like durability, without the ecological baggage
- Rich dark color that weathers to a natural gray (unless sealed)
- 100% domestic harvest & processing - Made in the USA!
- Long-term dimensional stability and rot resistance with no harmful chemicals
- FSC certified material from sustainably harvested forests

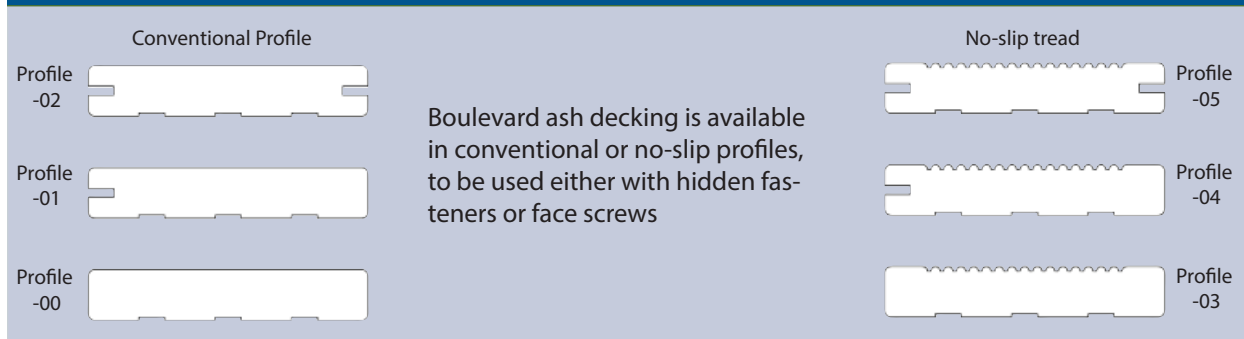

For more information about Boulevard Ash Decking visit [www.tournesolsiteworks.com/BL.html](http://www.tournesolsiteworks.com/BL.html)



**Tournesol**  
SITEWORKS

tournesolsiteworks.com  
800.542.2282

## Boulevard Ash Decking

Part No.	Description	Nominal Size	Actual Size	Length
BL-44	Boulevard Ash Decking	1 x 4	.75" x 3.5"	8', 10' 12'
BL-54	Boulevard Ash Decking	5/4 x 4	1" x 3.5"	8', 10' 12'
BL-46	Boulevard Ash Decking	1 x 6	.75" x 5.5"	8', 10' 12'
BL-56	Boulevard Ash Decking	5/4 x 6	1" x 5.5"	8', 10' 12'

## Boulevard Ash Dimensional Lumber

Part No.	Description	Nominal Size	Actual Size	Length
BL-82	Boulevard Dimensional Lumber	2 x 2	1.5" x 1.5"	8'
BL-84	Boulevard Dimensional Lumber	2 x 4	1.5" x 3.5"	8', 10' 12'
BL-86	Boulevard Dimensional Lumber	2 x 6	1.5" x 5.5"	8', 10' 12'
BL-164	Boulevard Dimensional Lumber	4 x 4	3.5" x 3.5"	8', 10' 12'
BL-44D	Boulevard Dimensional Lumber	1 x 4	.75" x 3.5"	8', 10' 12'
BL-46D	Boulevard Dimensional Lumber	1 x 6	.75" x 5.5"	8', 10' 12'

### Boulevard Decking Specifications:

Color - deep brown, will weather to gray unless sealed (Penofin Hardwood Formula is recommended).

Weathering starts within 1-3 months.

Process - Pre-kilned to max. 10% moisture content, heated to 374° F to remove moisture, sugars and sap. After heating steam added to stabilize moisture level at approx. 6%. Low moisture level and altered cell structure provides long-term dimensional stability and resistance to warp, twist, and other wood movement.

Durability - Certified to AWPA Use-Class UC3B, Above Ground, Exposed (see AWPA Guidance N for required tests)

EN-350-2 standard Class 1 (25+ years fully exposed) against rot, decay

Slight checking is acceptable, and will not affect long-term durability

Source - FSC certified domestic harvest, kilned, processed, finished in U.S.A.

Janka Hardness - 1290 (lbs-force)

Flame Spread Rating - Class A flame spread (ASTM-E84, 10 minute burn test)

Fastening - Tournesol Siteworks recommends the use of hidden fastener assemblies when installing

Decking should have a minimum of 4" clear space below to allow for air circulation

Boulevard ash decking can be cut, machined or modified like conventional wood.

Structural Wood Tiles (2x2, 4x2) available



**Tournesol**  
SITEWORKS

tournesolsiteworks.com  
800.542.2282

BL714  
©2014,  
Tournesol Siteworks