

# CWS Planter Liners

*Container Irrigation built into a wide range of rectangular sizes*

CWS Planter Liners combine Touresol Siteworks' water-efficient container irrigation system with a leakproof planter liner. They make construction of planters walls simpler than ever - no irrigation or plumbing required. They may be used in both exterior and interior applications, and are ideal when conventional irrigation isn't possible or practical. For longer runs, and within planter walls CWS planter liners are typically installed modularly, end to end. The flanges may be factory-trimmed to your custom dimensions, to fit perfectly into any application.




- Keeps plants healthy, strong and stress free by balancing moisture and oxygen in the soil
- Self-contained for interior, overflow drainage adapter for exterior applications
- Largest reservoir and longest maintenance interval of any self-watering system
- Adjustable flange-width and array of sizes will fit most applications

## *How Touresol's Container Irrigation Works:*

The self-contained reservoir is filled by hand, and closed with a stopper. Water flows through holes along the bottom of the liner to the soil, and wicks up to level of moisture sensor (typically in the middle of the unit).

The sensor absorbs moisture and closes, blocking the flow of air through the tube. A vacuum is created, preventing more water from flowing into soil. When the plant has used the water in the soil, the sensor dries, opens and the process starts anew.

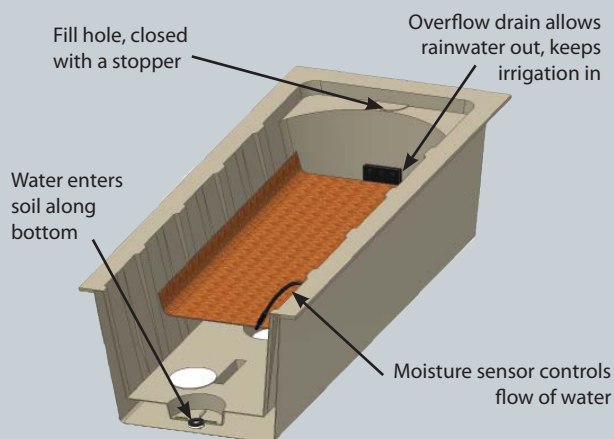

For more information about CWS Planter Liners, visit [www.touresolsiteworks.com/products/cis\\_liners\\_cws.asp](http://www.touresolsiteworks.com/products/cis_liners_cws.asp)




**Touresol**  
SITEWORKS

[touresolsiteworks.com](http://touresolsiteworks.com)  
800.542.2282

## CWS Planter Liners with Container Irrigation

Part No.	Width (A)	Planting Area (B)	Depth (C)	Nominal Lengths								
				24"	30"	36"	42"	48"	54"	60"	66"	72"
PB1-__	8"-10"	6"	8"	24"	30"	36"	42"	48"	54"	60"	66"	
PB2-__	11"-14"	8"	9"	24"	30"	36"	42"	48"	54"	60"	66"	
PB3-__	15"-18"	12"	9.25"	24"	30"	36"	42"	48"	54"	60"	66"	
PB4-__1412	13"-15"	10.25"	12"	24"	30"	36"	42"	48"	54"	60"		
PB4-__1716	16"-20"	13"	16"	24"	30"	36"	42"	48"	54"	60"	66"	
PB4-__2110	20"-22"	17.5"	10.5"	24"	30"	36"	42"	48"	54"	60"	66"	72"
PB4-__2116	20"-23"	16.25"	16"	24"	30"	36"	42"	48"	54"	60"	66"	72"
PB4-__2410	23"-25"	20"	10.5"	24"	30"	36"	42"	48"	54"	60"	66"	72"
PB4-__2517	24"-26"	20"	17"			36"		48"		60"		72"
PB4-__3010	28"-32"	25"	10.5"			36"	42"	48"	54"	60"	66"	72"
PB4-__3016	30"-32"	26.25"	16"	24"	30"	36"	42"	48"	54"	60"	66"	72"

\*\* Unless specified "for interior use", each CWS planter liner comes with a drainage overflow adapter pre-installed at one end .

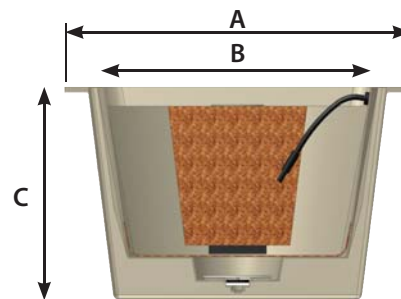

Typical Part Nomenclature:

PB4-302110

Nominal length of CWS Liner flange. Specify trim length in confirmation drawing (-1"/+3")

Nominal width of CWS Liner flange. Specify trim width in confirmation drawing (-1"/+3")

Nominal depth of CWS Liner. Non-adjustable.



**BETWEEN** LANDSCAPE + ARCHITECTURE



**Tournesol**  
SITE WORKS

tournesolsiteworks.com  
800.542.2282