

VersiJack®

Adjustable deck & paver pedestals


VersiJack® adjustable deck & paver pedestals are an economical replacement for brick, metal or wood substructures when installing raised pavers or decking. Raised podium floors allow for rapid drainage, easy accessibility to waterproofing membrane and concealed services below. Using purpose-built pedestals will simplify the design and reduce the installation cost compared to any other material.

VersiJack features optional indexing (up to 5%) slope correction either at the top of the pedestal or under the base, as well as secure, easy-to-set locking rings. The broad, stable base won't damage waterproofing, and can support more weight than any other pedestal system.

The pedestals can comfortably accommodate heights from 3" up to 40", and work equally well with pavers (using 3 standard paver spacing sizes) or with decking beams. They are manufactured in 100% recycled polypropylene, so won't rot, retain water, or promote bacteria growth.



- Use with concrete, stone, wood, or granite pavers—wet or dry conditions
- Exclusive beam holder makes level decks fast and easy
- Commercial quality—supports 3500 lbs.
- Adjustable from 3" to 40"
- Indexing slope compensation on top or bottom
- 100% post-consumer recycled material

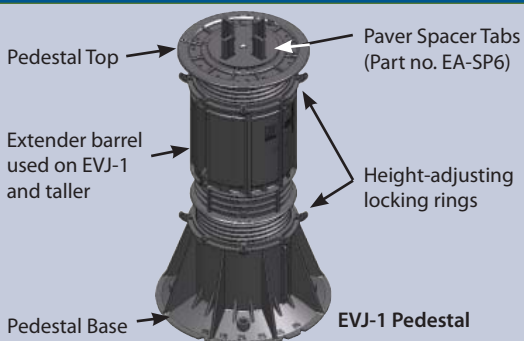

VersiJack utilizes a combination of components (top, base, and extender barrel) to support heights ranging from 3" to 40" from the base.

Add an indexing slope compensator (just set it to the roof slope between 1% and 5%) on either the pedestal top or base for fast, reliable rooftop installation.

Finish it off with either paver spacers (shown left), or a beam support for use with decking.

For more information about VersiJack® visit www.tournesolsiteworks.com/products/gr_evj.asp



Tournesol
SITEWORKS

tournesolsiteworks.com
800.542.2282

VersiJack® adjustable deck & paver pedestals

Part No.	Description	Height range
EVJ-00	VersiJack® Size 00, 6-3/8" dia.	Adjustable from 3" to 4-5/8"
EVJ-0	VersiJack® Size 0, 6-3/8" dia.	Adjustable from 4-5/8" to 8"
EVJ-1	VersiJack® Size 1, 6-3/8" dia.	Adjustable from 8" to 11"
EVJ-2	VersiJack® Size 2, 6-3/8" dia.	Adjustable from 11" to 17-1/2"
EVJ-3	VersiJack® Size 3, 6-3/8" dia.	Adjustable from 14" to 20-3/4"
EVJ-4	VersiJack® Size 4, 6-3/8" dia.	Adjustable from 17-1/4" to 27-1/4"
EVJ-5	VersiJack® Size 5, 6-3/8" dia.	Adjustable from 20-3/8" to 30-3/8"
EVJ-6	VersiJack® Size 6, 6-3/8" dia.	Adjustable from 23-1/2" to 36-3/8"
EVJ-7	VersiJack® Size 7, 6-3/8" dia.	Adjustable from 26-5/8" to 40"

VersiJack® Accessories

Part No.	Description	Height range
EA-BH	Beam Support, 6-3/8"dia x 1"h adds 1/4" additional height	Supports beams from 1-3/4" to 3-1/2" W
EVJ-SCB	Base Slope Corrector, 6-3/8"dia x 1-3/4"h	Adds 1-3/4" height to any SpiraPave
EA-SCT	Platform Slope Corrector, 6-3/8"dia	Slope correction from 1% to 5%, in 1% increments
EA-SP4	Paver Spacer Tab, 3"dia x 1"h	Provides 1/8" spacing between pavers
EA-SP6	Paver Spacer Tab, 3"dia x 1"h	Provides 1/4" spacing between pavers
EA-SP10	Paver Spacer Tab, 3"dia x 1"h	Provides 3/8" spacing between pavers
EA-01	Neoprene Shim, 5.5"dia. x 1mm (.04")	May be divided into quarters
EA-02	Neoprene Shim, 5.5"dia. x 2mm (.08")	May be divided into quarters

All VersiJack products are manufactured in 100% post-consumer recycled polypropylene. The material is unaffected by mold or algae, and is resistant to most chemicals. The ultimate compressive strength, as measured by ASTM D695-08, is 20kN (4496 lbf), which will support 3500 lbs. Units are delivered pre-assembled. Place the jack and spin the top pedestal and/or mid barrels to adjust the height. Snug up the locking rings once the height is correct. The slope corrector can be set for the correct roof pitch, then the beam support or paver spacer tab installed and rotated to the correct orientation.



BETWEEN LANDSCAPE
+ ARCHITECTURE



Tournesol
SITE WORKS

tournesolsiteworks.com
800.542.2282

EVJ312
©2012,
Tournesol Siteworks