

VersiPave®


Adjustable paver supports

VersiPave® paver supports allow the easy placement of pavers on roofs, plaza decks, podium platforms, balconies, or anywhere that well-drained, level paver surfaces are required. They eliminate the need for sand, aggregate or mortar bedding courses. By raising the paver surface, VersiPave® ensures rapid drainage, simplifies maintenance on drains and waterproofing, and improves thermal and acoustic insulation by creating an airspace between the pavers and the surface slab.

The supports are manufactured in 100% recycled polypropylene, so will not rot, retain water or promote bacteria growth. Designed for commercial installations, each support will support more than 4000 lbs. They can be divided into halves or quarters for use along walls or in corners.



- Lightweight, eliminates need for heavy bedding courses
- 100% post-consumer recycled material
- Easy-to-install, adjusts for pavers of different thickness
- Commercial grade, will support over 4000 lbs.
- Split into half or quarters for walls and corners
- Raise with additional stacking extenders

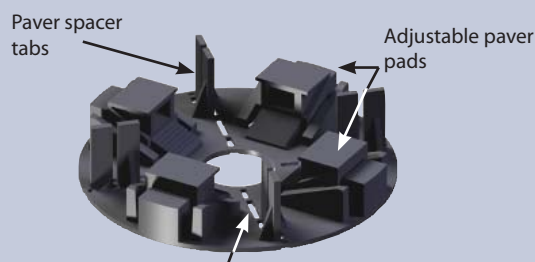

Split along this line for half or quarter supports

VersiPave® are circular supports, divided into four corner pads by 1-1/2" H x 1/8" W paver spacer tabs. Each pad can independently be adjusted from 1" to 1-5/16" high in 1/16" increments, especially useful when using pavers of varying thickness. Pads are quick and easy to field adjust, ensuring a secure, even paver surface. Optional extenders can raise the platform an additional 3/8" or 1-3/16".

For more information about VersiPave, visit www.tournesolsiteworks.com/products/gr_evp.asp




Tournesol
SITEWORKS

tournesolsiteworks.com
800.542.2282

VersiPave® paver supports and accessories

Part No.	Description	Height range
EVP-150	VersiPave®, 6-3/8" dia. x 1-1/2" (top of spacers)	1" to 1-5/16" height
EVP-EXT37	VersiPave® Extender	Adds 3/8" to height of EVP-150 (may be combined with other extenders)
EVP-118	VersiPave® Extender	Adds 1-3/16" to height of EVP-150 (may be combined with other extenders)

All VersiPave® products are manufactured in 100% post-consumer recycled polypropylene. The material is unaffected by mold or algae, and is resistant to most chemicals. The ultimate compressive strength, as measured by ASTM D695-08, is 25kN (5607 lbf), which will support 4400 lbs. Units are delivered pre-assembled. Place the paver supports at each corner of the paver, and slide pad up to correct height. Break unit in half for edge locations, in quarters for corners.

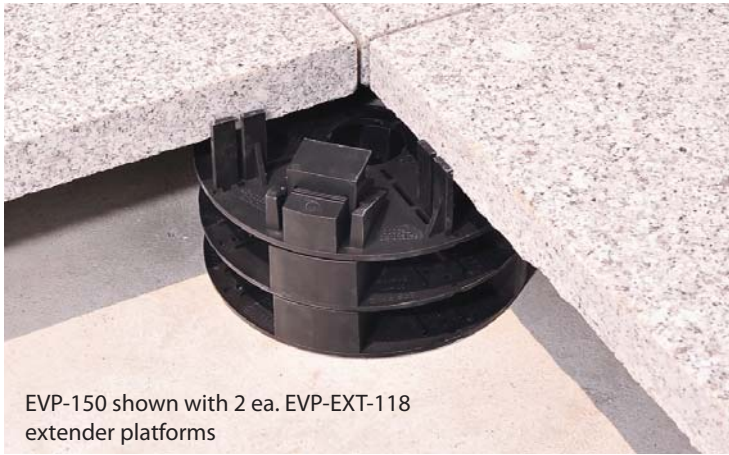

EVP-150 shown with 2 ea. EVP-EXT-118 extender platforms



Tournesol
SITEWORKS

tournesolsiteworks.com
800.542.2282

EVP312
©2012,
Tournesol Siteworks